



High Performance Sliding Window

The Classic Range


The Carinya Classic High Performance Sliding Window is a new development not previously available in the residential category for Australia's most demanding terrain requirements.

Besides a modern designer look, the Carinya Classic High Performance Sliding Window is packed with a multitude of performance features, many of which are simply not available in competing products:

- ✧ Rather than unsightly exposed tracks found in most residential windows, Carinya has a complete range of threshold and jamb infills as well as end caps to conceal all cavities. This not only provides a superior quality, commercial grade finish but also minimises places for insects, dirt and grit to gather.
- ✧ A range of attractive interlock options to meet a wide variety of wind load requirements
- ✧ Sills to suit the most severe conditions of residential construction.



58mm wide rails and stile.

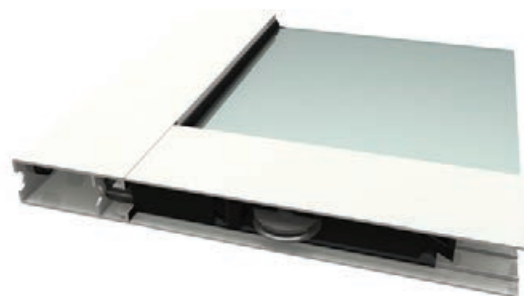

Commercial grade rollers up to 160kg.

The entire Carinya Collection has been fully tested to meet or exceed Australian Standards AS2047, AS1170, AS1191 and AS3959.



STREAMLINED HARDWARE

The Carinya Classic High Performance Sliding Window has been matched with commercially designed hardware to ensure style and durability in the harshest of environments.

Our Sliding Window Lock provides functionality and varying finish options for your project. This functional retractable handle design allows for ease of use and utilises 5 pin cylinder security for peace of mind.

To maximise the performance of your sliding window we have utilised our proprietary Alspec roller system used throughout our commercial range.

Stainless rollers and optional stainless cover track are also available for coastal environments, allowing for enduring performance and durability.

Both roller systems have been designed to interact with the stiles to create a strong and robust panel, minimising movement in joints and opportunities for air infiltration.

Applications

- Region D Residential Construction for Cyclonic Compliance
- Double Glazing without adaptors for a premium option
- Low-Rise Multi-Unit Developments

Specifications

- Maximum Panel Height: 1800mm
- Maximum Panel Width: 1200mm
- Maximum Single Glazed Thickness: 12mm
- Maximum Double Glazed Thickness: 18mm
- Maximum Sash Weight: 160kg
- Frame width available in 92mm

Options

- A range of sill options available for increased structural, water performance and design flexibility.
- A range of internal interlocks complete with end caps for varying wind load requirements.
- Integral screening options for security or insect protection.

Configurations

Your Carinya Dealer can offer the typical standard configurations below, as well as custom options to suit your requirements:



Proudly supplied by



2/10 Ferngrove Place, Chester Hill NSW 2162
sales@jensenwindows.com.au
www.jensenwindows.com.au
Phone 02 9713 2177

Quality without compromise