



Classic Sliding Door

The Classic Range

The Carinya Classic Sliding Door is a product in the residential market having evolved out of a system designed for the high rise apartment market.

This commercial background means that besides a modern designer look, the Carinya Classic Sliding Door is packed with a multitude of performance features, many of which are simply not available in competing products:

- ✧ Rather than unsightly exposed tracks found in most residential doors, Carinya has a complete range of threshold and jamb in-fills as well as end caps to conceal all cavities. This not only provides a superior quality, commercial grade finish but also minimises places for insects, dirt and grit to gather.
- ✧ An internally concealed weather flap also reduces air and water infiltration and minimises insect intrusion through the drain holes.
- All Carinya sliding doors feature a choice of sill configurations catering for every weather performance requirement, including a wheelchair accessible sill.
- ✧ There is also a range of attractive interlock options to meet a wide variety of wind load requirements up to the most demanding cyclonic conditions.



Functional and stylish Dual Point Yarra Curve door lock. Yarra Edge door lock with optional stylish colours also available.



Alspec's high performance, commercial door roller used in the Carinya residential sliding door for smooth operation.

The entire Carinya Collection has been fully tested to meet or exceed Australian Standards AS2047, AS1170, AS1191 and AS3959.



STREAMLINED HARDWARE

The Carinya Classic Sliding Door has been matched with commercially designed hardware to ensure style and durability.

The Yarra Curve and Edge door locks provides functionality and varying finish options for your project. This functional design allows for ease of use and utilises 5 pin cylinder security for peace of mind.

To maximise the performance of your sliding door we have utilised a proprietary Alspec roller system. It's the same system used throughout the commercial range and is available in two options - General use: for the majority of loads up to 80kg per panel; and Heavy duty commercial: designed for extra large sashes and major double glazing loads up to 160kg per panel.

Both roller options have been designed to integrate with the stiles to create a strong and robust panel, minimising movement in joints and opportunities for air infiltration.

Applications

- New residential construction.
- Door replacement and renovation.
- Aged care & wheelchair requirements.
- Low-rise multi unit developments.
- Suitable for cyclonic regions C & D.

Specifications


- Maximum Panel Height: 2400mm
- Maximum Panel Width: 1200mm
- Maximum Single Glazed Thickness: 10.5mm
- Maximum Double Glazed Thickness: 18mm
- Maximum Sash Weight: 160kg
- *subject to site conditions

Options

- A range of sill options available for increased structural, water performance and design flexibility.
- A range of interlocks complete with end caps for varying wind load requirements.
- Choice of configurations available, including stacking and corner options.
- A range of mid rails available for semi-commercial unit developments.

Configurations

Your Carinya Dealer can offer the typical standard configurations below, as well as custom options to suit your requirements:

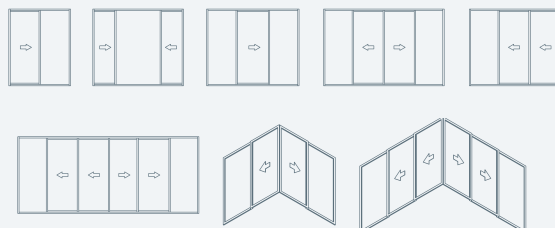

Proudly supplied by

JENSEN
WINDOWS

2/10 Ferngrove Place, Chester Hill NSW 2162
sales@jensenwindows.com.au
www.jensenwindows.com.au
Phone 02 9713 2177

Quality without compromise