



# Classic Sliding Window

## *The Classic Range*

*The Carinya Classic Sliding Window is a unique combination of form and function not previously available in the residential category.*

Carinya has many visible advantages over alternative products in addition to its obvious aesthetic qualities, these include:

- ✧ Exclusive handle located on the mullion for ease of access and cleaner lines.
- ✧ In built weather flaps - a feature of all Carinya windows - to reduce air and water infiltration, cover drain slots and minimise insect intrusion.
- ✧ Proprietary adjustable, non-corrosive roller system - the 'engine room' of these high performance windows - provides an effortless gliding motion that makes the window a joy to operate.
- ✧ Anti-lift block fitted above the sash to prevent manipulation and increase security.
- ✧ Mullion and transom end caps that ensure insects have no place to hide.



Exclusive proprietary handle for ease of operation with optional colour finishes.



Stainless housing commercial grade rollers for all glass options.

**The entire Carinya Collection has been fully tested to meet or exceed Australian Standards AS2047, AS1170, AS1191 and AS3959.**

# STREAMLINED HARDWARE

*The Carinya Classic Sliding Window has been designed with matching stylish hardware, with the option for a lockable or non-lockable proprietary handle.*

The slimline handle design, mounted in an easily accessible position on the rear of the sliding sash, offers ease of use and minimises view obstruction.

To maximise the performance and life of your window proprietary commercial rollers are used that have been tried and proven in commercial applications such as schools and offices. This ensures that your windows will always be easy to open, even with large sashes and heavier glass options.

All Carinya Sliding Window sashes feature corner blocks in all four corners of the sliding sash. These blocks make the sash more rigid, reducing twisting and movement. This reduction in movement increases the performance of the window by reducing opportunities for air and water infiltration.

An optional vent lock is also available allowing the sliding sash to be secured in a semi-opened position for increased safety.

## Applications

- New residential construction.
- Window replacement and renovation.
- Low-rise building.
- Suitable for cyclonic regions C & D.

## Specifications

- Maximum Sash Height: 1500mm
- Maximum Sash Width: 1200mm
- Maximum Single Glazed Thickness: 10.5mm
- Maximum Double Glazed Thickness: 18mm
- Maximum Sash Weight: 40kg


\*subject to site conditions

## Options

- A range of sill options are available for applications requiring increased weather performance.
- A range of mullions and transoms complete with end caps for a quality finish.
- Choice of screening options with superior mesh solutions.
- Optional secondary glazing for high acoustic requirements.

## Configurations

Your Carinya Dealer can offer the typical standard configurations below, as well as custom options to suit your requirements:

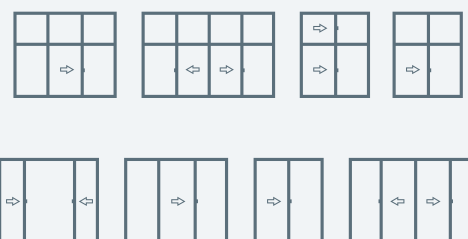

Proudly supplied by

**JENSEN**  
WINDOWS

2/10 Ferngrove Place, Chester Hill NSW 2162  
sales@jensenwindows.com.au  
www.jensenwindows.com.au  
Phone 02 9713 2177

*Quality without compromise*